



NIGRELLI
by **bw** packaging

END-OF-LINE

CASE PACKING



WP 35 WRAPAROUND CASE PACKER

Video



Video



Our Nigrelli WP 35 WrapAround Case Packers are state-of-the-art machines, utilizing servo drive technology and intermittent motion to deliver exceptional case output rates. With their compact and flexible design, these machines are perfect for the food, beverage, and consumer products industries. They can effortlessly handle a diverse range of product styles, including cartons, tubs, cans, and jars.

Nigrelli WP 35 WrapAround Case Packer


DESCRIPTION

Our WP 35 Case Packers are highly advanced, efficient, and flexible end-of-line packaging machines that offer an array of infeed options for packaged products. These machines are designed to collate the packaged products prior to loading, and can be configured for in-line, reverse, or right-angle flow systems with ease, thanks to their modular design.

The WP 35 is a fully automatic packer that can process up to thirty-five cases per minute, making it a highly efficient and reliable solution for businesses that require high-speed packaging. This packer supports various case styles, including harness, inside manufacturer's flap, and outside manufacturer's flap, making it a versatile solution for businesses with different packaging requirements.

FEATURES

- Up to 300 corrugated case blanks storage capacity
- All servo driven for optimal performance
- Nordson hot-melt glue system
- Capable of both inside or outside manufacturer's joint closure
- Convenient 4' low profile magazine with a floor load height of 24"
- 39" load and discharge height
- Allen-Bradley PanelView HMI & Logix Series PLC
- PIAB vacuum generator system
- Full perimeter guard package
- Three-color beacon
- UL listed electrical enclosures
- Low level case detection
- Open flap detection
- Quick changeover options

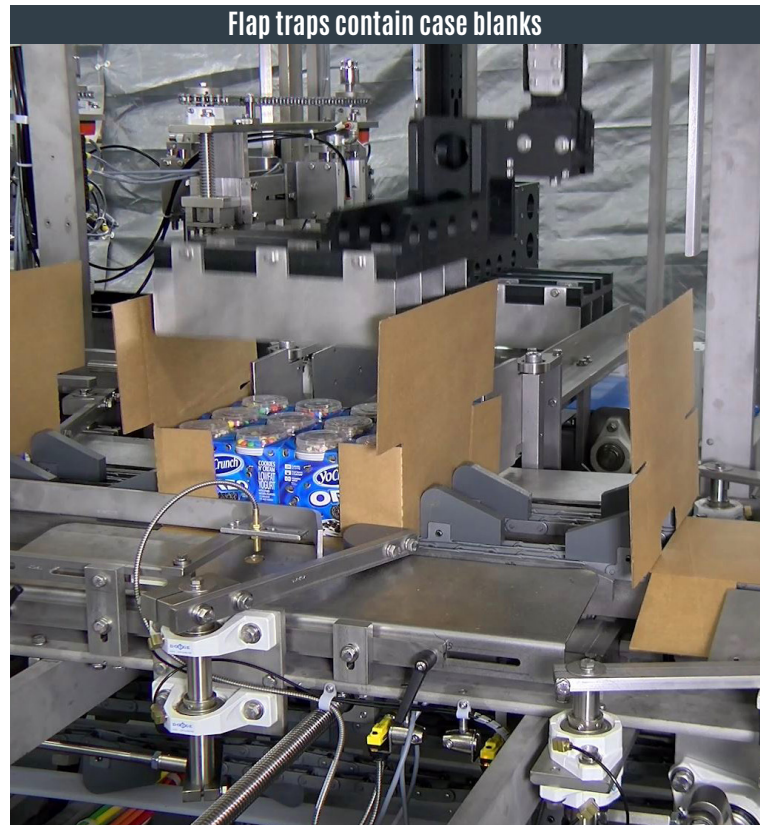

24" Pitch	30" Pitch	Electrical Requirements	Air Requirements
<ul style="list-style-type: none">• Length: 8" - 15" (203mm - 382mm)• Width: 5" - 12" (127mm - 305mm)• Depth: 8" - 20" (203mm - 508mm)	<ul style="list-style-type: none">• Length: 4" - 18" (102mm - 457mm)• Width: 4" - 12" (102mm - 305mm)• Depth: 6" - 16" (152mm - 406mm)	<ul style="list-style-type: none">• 240/480 volts, 3-phase, 60 Hz, 30A• Control Voltage: 24 VDC	<ul style="list-style-type: none">• Operating Pressure: 80 psi (5.4 atm)• Line Pressure: 90 psi (6.1 atm)• Max Free Air Consumption: 8-12 cfm depending on speed

Contact our experienced sales teams today for a comprehensive review of your application(s) and to see how our WrapAround Case Packers can benefit your company.