




**SLEEVIT**  
by **bw** packaging

**LABELING**

**SHRINK SLEEVE**

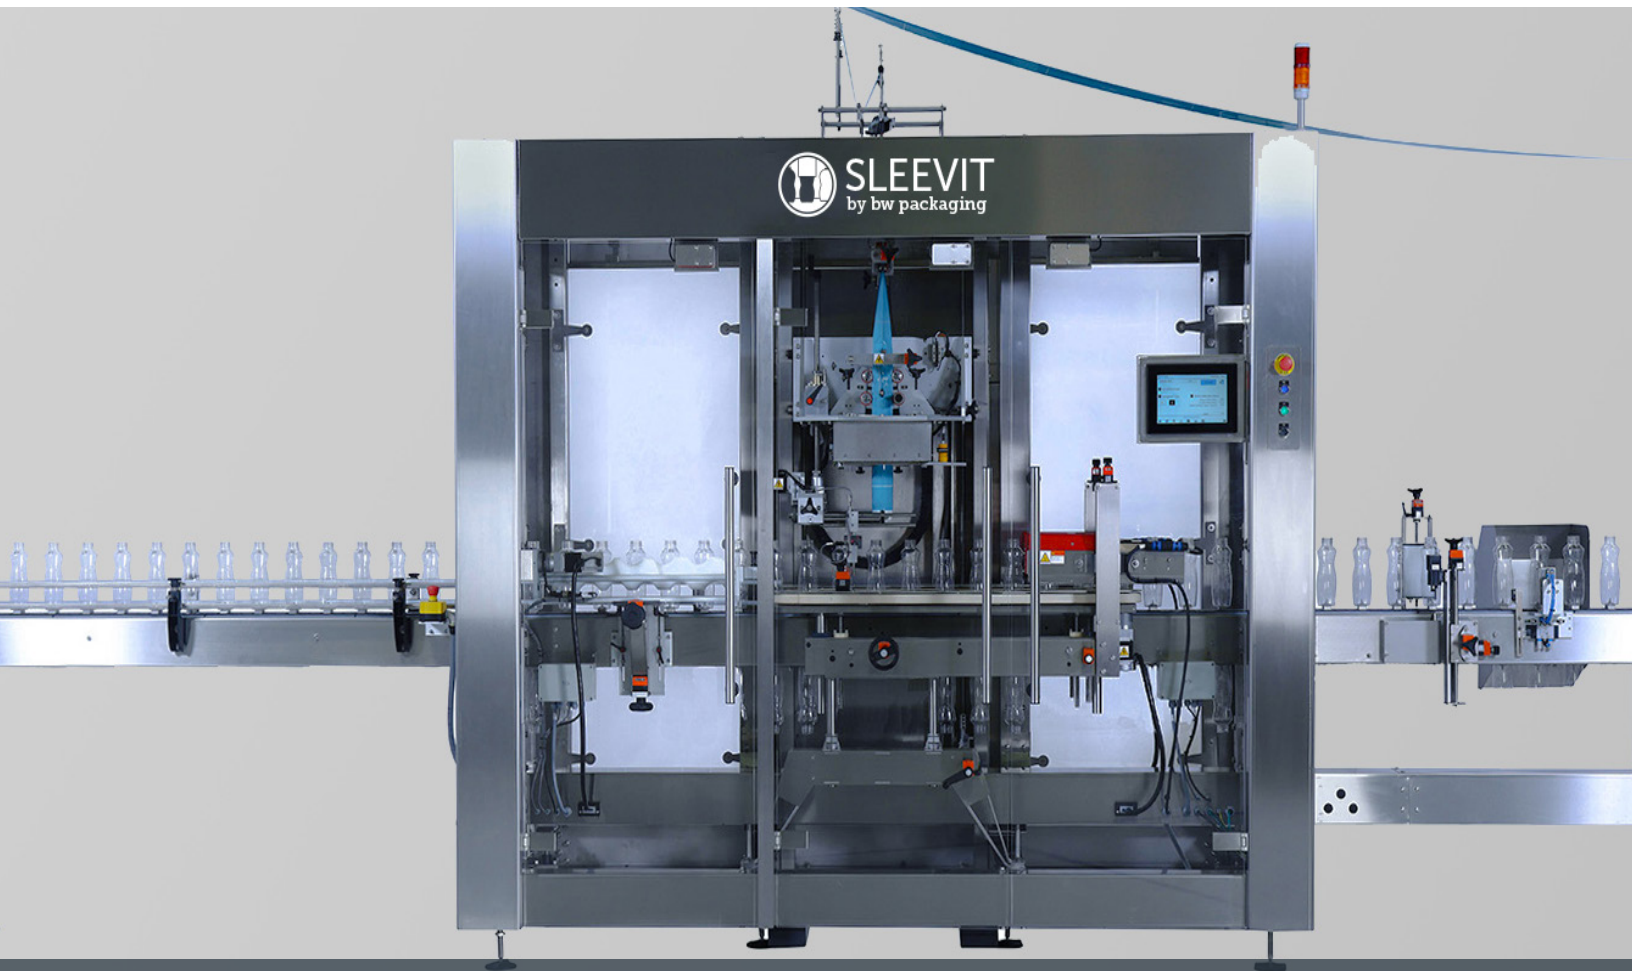

## VF SERIES


As the shrink sleeve marketplace continues to evolve with a strong focus on sustainability and label down gauging, the VF Shrink Sleeve Applicator has been designed to handle the latest label technology. With a modular design that offers flexibility to scale based on your business needs, this applicator is a perfect fit for your growing business.

The VF Shrink Sleeve Applicator's ergonomic design prioritizes safety, ease of use, productivity, and performance while optimizing a minimal footprint. You can expect improved output, simplified changeovers, streamlined operations, and reduced maintenance costs, all while enhancing the appearance of your shrink sleeve labels!

# Sleevit VF Series Shrink Sleeve Applicators

## FEATURES

The VF Shrink Sleeve Applicator is a versatile machine that can apply Full Body, Part Body, and Tamper Evident sleeves to empty or filled containers made of popular sustainable plastics such as Metal and Glass. It can be used with PETG, PETC, RPET, PO, OPS, Hybrid, PVC, PLA material that is 40 to 70 microns thick. The VF Shrink Sleeve Applicator has two modular guillotine cutting units available for products ranging from 30mm to 170mm and offers tool-less mechanical adjustment, servo control, and next-generation OpView™ HMI. The machine can achieve speeds of up to 350ppm or 650ppm at 30mm cut-length. Additionally, the VF Shrink Sleeve Applicator can be integrated with a comprehensive range of Sleeveit ancillary modules and our Hot Air (Convection) and IR (Infra-Red) heat tunnels to provide a completely integrated solution.

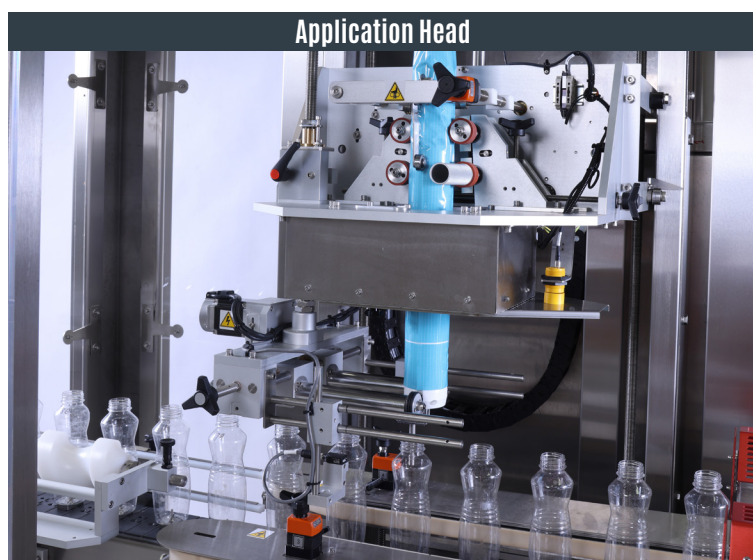

Container Diameter	Sleeve Length	Unwind	Conveyor Height	Utility Requirements
<ul style="list-style-type: none"><li>30mm-170mm</li></ul>	<ul style="list-style-type: none"><li>30mm-300mm</li></ul>	<ul style="list-style-type: none"><li>Maximum Diameter 600 mm</li><li>Core Diameter 5" (127mm)</li></ul>	<ul style="list-style-type: none"><li>Minimum: 35.43" [900mm]</li><li>Maximum: 39.37" [1000mm]</li></ul>	<ul style="list-style-type: none"><li>380v - 415 Vac</li><li>3 Phase +Neutral + Earth 35A</li></ul>

All specification and tooling requirements are subject to our evaluation of all label and product samples. Specifications shown reflect standard machine capabilities. We can also meet other specification requirements, call for details.

**Contact** our experienced sales teams today for a comprehensive review of your application(s) and to see how our VF Series Shrink Sleeve Applicators can benefit your company.