END-OF-LINE



CASE ERECTING



CE 35X SERIES CASE ERECTOR

Introducing the robust and high-speed SWF CE 35X Series Case Erectors, designed to efficiently fold and seal the bottom flaps of RSC and HSC cases with ease. Available with tape or glue adhesive options, these machines deliver exceptional performance.

Our standard model features a magazine length of 37 inches and operates at an impressive speed of up to 35 cases per minute. Experience cost-effective, energy-saving operation with our innovative continuous rotational-motion technology.



SWF CE 35X Series Case Erector

DESCRIPTION


For over six decades, SWF has led the way in providing top-quality packaging equipment solutions across various industries. Our bliss, tray, and case erecting product line has consistently been an industry leader, helping countless businesses identify the best packaging design and machinery solutions for their needs. Our equipment features a small footprint, rugged 24/7 construction, an easy-to-use operator interface, and quick changeover times, making it an ideal choice for businesses of all sizes. Additionally, the equipment includes a high-speed tape head (pressurized hot-melt glue system available as an option), an automatic jam shutdown sensor, and polycarbonate interlocked guards and doors for enhanced safety. With thousands of installations worldwide and supported by a world-class service team, you can rely on SWF to deliver the highest quality packaging equipment for your business.

FEATURES

- · 2" Dekka high-speed tape head
- Indirect Food Grade design
- Lexan guard package
- 4-color stack light
- Low magazine, broken tape, no tape, low tape, downstream not ready, jam, open flap detection
- 7" Allen Bradley Optix HMI with data collection
- Safety PLC / Ethernet port / Unmanaged Ethernet switch

AVAILABLE OPTIONS

- 3" high-speed tape head
- 3M tape head
- Nordson glue / Nordson glue repository system
- Extended magazine
- LED machine lighting with fault location
- Stainless Steel construction / Stainless Steel mesh guards

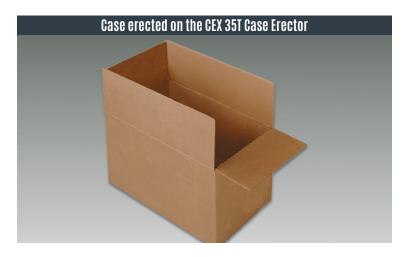

Speed	Case Size Capabilities	Knocked Down
Up to 35 cases per minute (dependent on size and style)	 Length: 8" - 22" (20.32 cm - 55.88 cm) Width: 6" - 14" (15.24 cm - 35.56 cm) 	• A Dimension: 13" - 34" (33.02 cm - 86.36 cm) • B Dimension: 11" - 27" (27.94 cm - 68.58 cm)
	• Depth: 4" - 16" (10.16 cm - 40.64 cm)	• S (Depth+Top+Flaps): 8" - 23" (20.32 cm - 58.42 cm)
		• C (Flaps to be glued): 3" - 7" (7.62 cm - 17.78 cm)

Contact our experienced sales teams today for a comprehensive review of your application(s) and to see how our Case Erectors can benefit your company.

