

TISMA Compact Horizontal Cartoner (HZ-100)



BW Integrated Systems' TISMA HZ-100 Compact Horizontal Cartoner is specifically designed to handle stackable products. Multiple carton load stations, increased throughput performance, rotary flap tuckers, and adjustable carton plows are just a few of the many features of this machine.


TISMA Compact Horizontal Cartoner (HZ-100)

The BW Integrated Systems' HZ-100 Horizontal Cartoner is available in both intermittent motion and continuous motion versions depending on the application requirements. The system is servo driven, and features an Allen-Bradley Logix Series PLC. The HZ-100 offers straight or reverse tuck, scaled adjustments, precision milled carton packets, gear-driven rotary carton placer, a powered carton magazine, and pneumatic loader.

Optional Features

- Flexo-Tray® article buckets
- Continuous motion/pusher barrel cam
- Extended carton magazines
- Hot melt glue carton closing
- Adjustable carton pockets
- Pendant HMI
- Robotic infeeds
- Bottle loaders
- Custom product infeeds
- Scanner, labeler, friction feeder integration

Contact our experienced sales teams today for a comprehensive review of your application(s) and to see how our HZ-100 TISMA Compact Horizontal Cartoner can benefit your company.

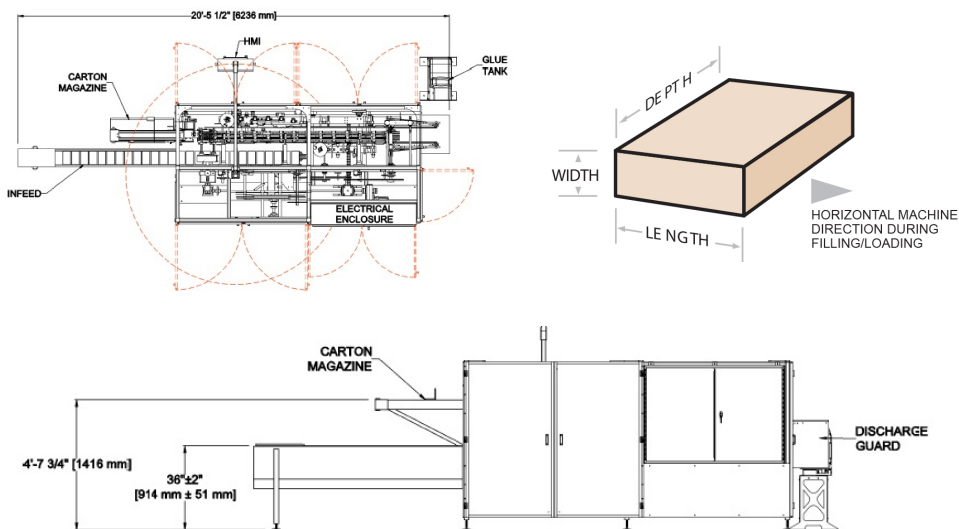

All sales are subject to our prevailing terms and conditions. Illustrations and specifications are subject to change without notice. Machines shown without guards are for illustrative purposes only. Guards are supplied and must be in place before operation.

Features

- Easy carton magazine loading
- Accessible product loading area
- Segregation of production and drive slides
- Clean design under product loading area
- Versatile servo drive - continuous or intermittent motion
- Up to 440 cartons per minute
- Welded stainless steel frame

Specifications

Production Speed

Up to 440 cartons

Carton Size Range

Length - 1/2" to 6" (13 mm to 152 mm)

Width - 1/2" to 6 1/2" (13 mm to 165 mm)

Depth - 2" to 8" (51 mm to 203 mm)

Drive

Single axis servo

Infeeds

Wide range of infeeds available for product orientation

Carton Magazine

4' (914 mm) Horizontal Standard

Carton Set-Up

2 or 4-Head Rotary Placer

Flap Closure

Glue or Tuck

Electrical Control

Allen-Bradley Logix Series PLC

Finish

Paint standard; stainless steel available

Installation Requirements

Power - One drop (specify voltage)

Air - One drop 60-80 PSI