



CE 442 Case Erector (Hot Melt Adhesive Erector/Bottom Sealer)



BW Integrated Systems' Thiele CE 442 Case Erector automatically selects, erects, squares and seals the bottom flaps of regular-slotted (RSC), and half-slotted (HSC) corrugated cases. Speeds of up to 30 cases per minute are possible, depending upon the model configuration and case size.

CE 442 Case Erector (Hot Melt Adhesive Erector/Bottom Sealer)

The CE 442 is equipped with a 6' right-angle magazine. A powered magazine that automatically indexes the next stack of cases into position, after the previous stack has been depleted, is available as an option. Our unique case selection system, which selects one case at a time from the top of the stack, enables the machine to handle warped board and other corrugated variations.



Opposing vacuum cups in the erecting station allow the CE 442 to separate the case as it is being erected, thereby effectively breaking the score lines and any possible over-glued manufacturer's joint.

To operate the CE 442, a stack of cases is placed in the case magazine. Vacuum cups select a case from the top of the stack and index it to the erecting station.

Once in the erecting station, the case is opened and erected using the vacuum cup system. The front and rear minor flaps are folded inward 90° and then the major flaps are folded 90°.

As the case is transferred by a mechanical walking stick through the machine, a pre-determined glue pattern (through touch screen) will apply hot melt adhesive to both minor flaps. The case then moves into compression where squaring of the case occurs. Squaring is accomplished by simultaneous actions of a top lug which drops in behind the top trailing panel as the case reaches the compression station, and by a compression ram toe which squares the case as the ram completes the folding of the major flaps.

Contact our experienced sales teams today for a comprehensive review of your application(s) and to see how our CE 442 Case Erector can benefit your company.

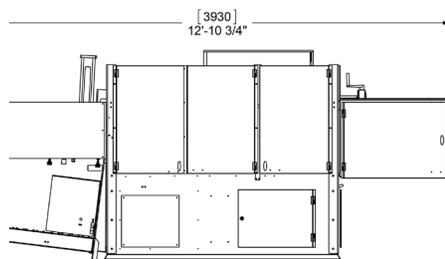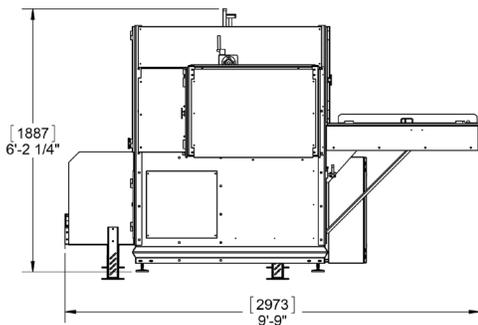

All sales are subject to our prevailing terms and conditions. Illustrations and specifications are subject to change without notice. Machines shown without guards are for illustrative purposes only. Guards are supplied and must be in place before operation.

Features

- Speeds of up to 30 cases per minute, depending upon case size and machine configuration
- Opposing vacuum cups in the erecting station
- Changeover in under 3 minutes
- Vacuum transducers are used instead of vacuum pumps
- Case flaps are pre-folded in a stationary position
- Allen-Bradley MicroLogix™ PLC
- Nordson hot melt glue system

Specifications

Magazine Capacity

Up to 250 cases, depending on case size. Larger capacities are available with optional magazine extensions.

Case Size Range

Length - 7" to 24" (178mm to 610mm)

Width - 5½" to 16" (139mm to 406mm)

Depth - 6½" to 24" (165mm to 610mm) includes top flaps

Electrical Requirements

Electrical Service - 240 volts AC, 3 phase, 60 Hz standard; other voltages are available as options

Control - 120 volt control power is obtained through a transformer supplied with machine; primary operator controls are 24 volt DC obtained through an internal supply

Max. Current Draw - 10 Amps (240 VAC)

Air Requirements

Operating Pressure - 60 psi (4.1 bar)

Line Pressure - 90 psi (6.2 bar)

Maximum Free Air Consumption - 30 SCFM @ 20 cases per minute