




WrapStar™ Top and Side Seal Multiwrap Sleever (T I S M A Series)

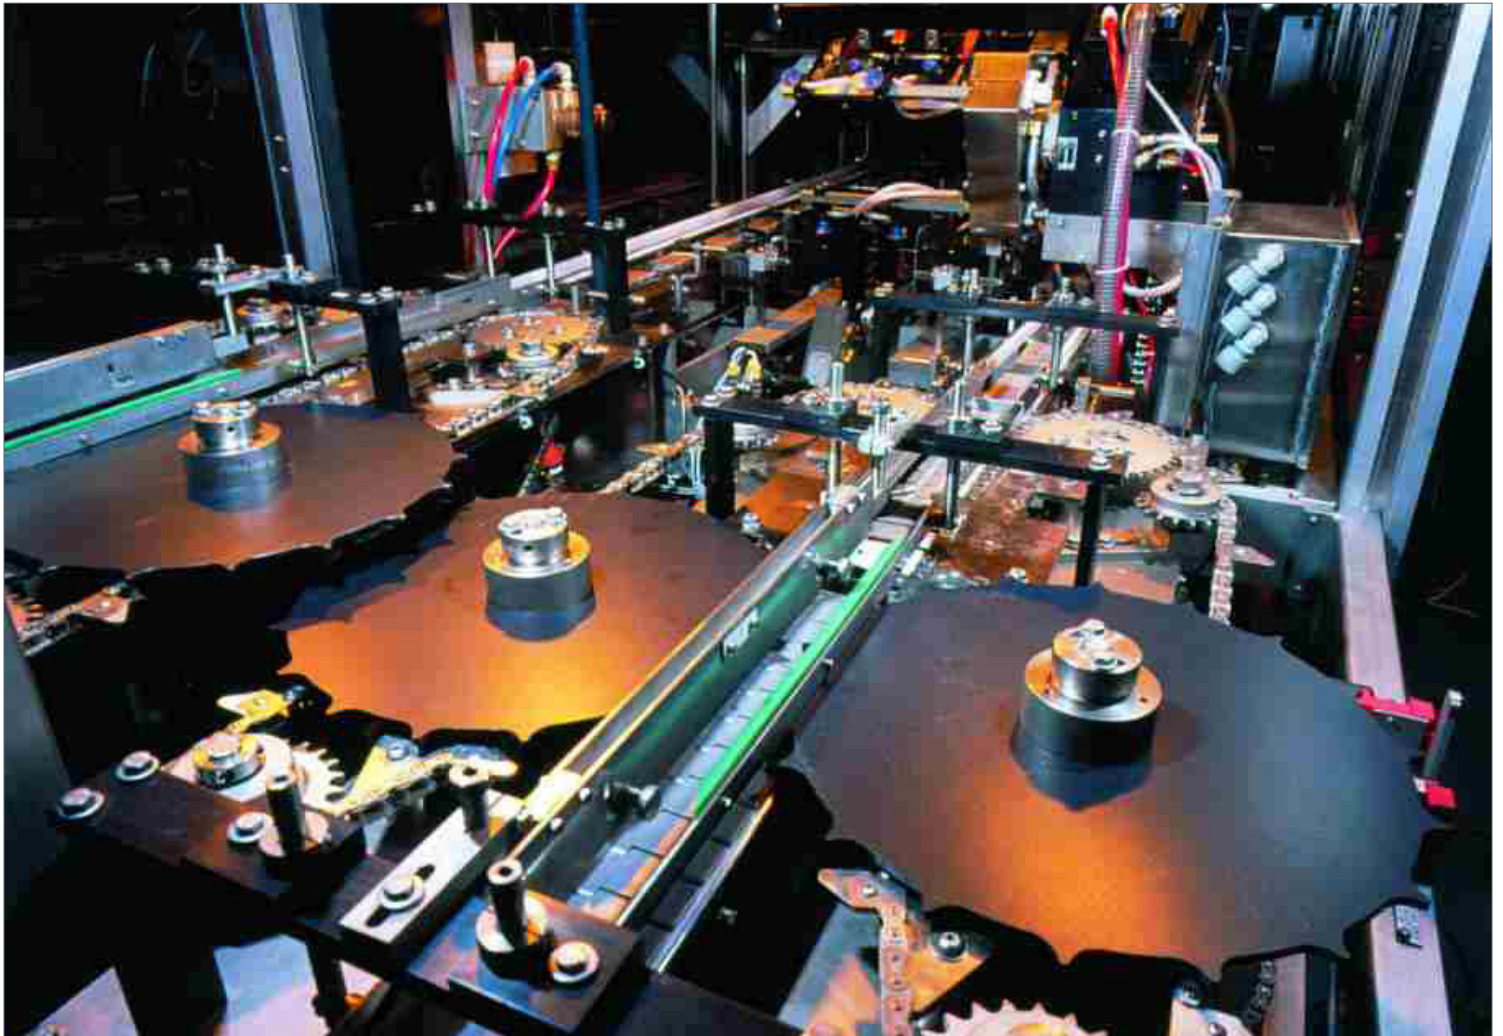

BW Integrated Systems' **T I S M A Series** WrapStar Sleever sets the standard for sleeve packaging productivity utilizing robust construction and multi-axis servo technology. The WrapStar Multiwrap Sleever features continuous motion functionality and handles a wide variety of product shapes.


WrapStar™ Top and Side Seal Multiwrap Sleever (T I S M A Series)

The starwheel metering system precisely controls product feeding into the infeed transfer section. Next, a legendary BW Integrated Systems rotary placer accurately places sleeves based upon product presence. Lastly, the unitized sleeve squaring and gluing system produces repeatedly squared sleeved products.

Available Features

- Intermittent motion/continuous motion functionality
- Allen-Bradley Logix Series PLC
- Allen-Bradley multi-axis servo drive system
- Quick change assemblies for product changeover
- Digital readout package
- Low sleeve detection in hopper
- Stainless steel frame
- NEMA 4X washdown electrical construction
- Placer for divider board between product layers
- Non-corrosive product contact surfaces
- Pneumatically activated top hold down rails
- Minimal moving parts to load product

Let us show you how you can have both higher productivity and higher profits. BW Integrated Systems offers the highest level of support, from product handling solutions to defining specifications to integration on your line. Contact our experienced sales teams today for a comprehensive review of your application(s) and to see how our WrapStar™ Top and Side Seal Multiwrap Sleever can benefit your company.

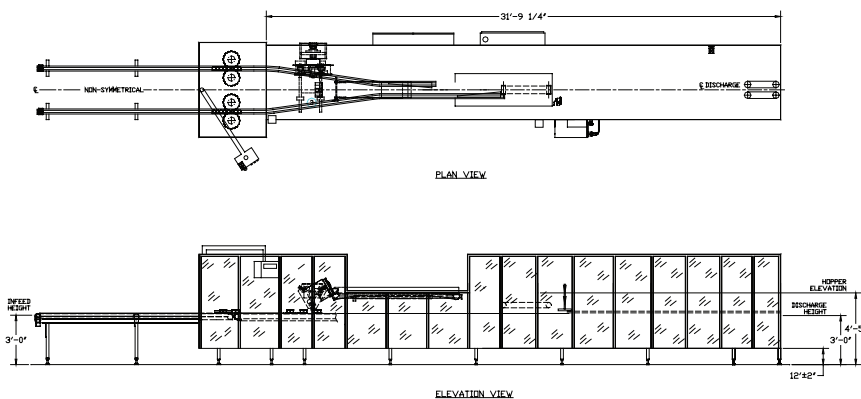

All sales are subject to our prevailing terms and conditions. Illustrations and specifications are subject to change without notice. Machines shown without guards are for illustrative purposes only. Guards are supplied and must be in place before operation.

Features

- Single or double tier wrap capable of one to sixteen packs
- Handles a wide variety of product shapes
- Up to 250 sleeves per minute depending on configuration
- Multi-axis servo drive system
- Allen-Bradley PanelView HMI
- Full perimeter polycarbonate guarding with radio frequency style guard door switches (category 4)
- Low profile design
- Nordson glue system
- Allen-Bradley Logix Series PLC

Specifications

Speed

Variable to 250 sleeves per minute depending upon package configuration

Product Size Range

Length - 2" to 10½"
Width - ½" to 4"
Depth - 4½" to 12"

Drive

Multi-axis servo

Infeeds

Wide range of infeeds available for product orientation

Sleeve Magazine

8' Horizontal Standard

Sleeve Set-Up

4-Head Rotary Placer

Glue System

Nordson

Electrical Control

Allen-Bradley Logix Series PLC

Finish

Paint standard; stainless steel available

Installation Requirements

Power - One drop (specify voltage)
Air - One drop 60-80 PSI

