

Shingling Conveyor

Overview

Streamfeeder's Shingling Conveyor provides flexibility and versatility wherever product collection is required. The slow-moving design allows collection of products in a shingled manner and the amount of shingle can be controlled by the variable speed control. The high-torque drive system is designed to handle large workloads ensuring years of dependable operation.

Optional batch counting capabilities can be added to eliminate manual counting of products.

Standard Features

- Powder coated steel frame for durability
- Variable speed control for shingling control
- Long lasting, durable belt (choose from a single 10" wide belt or two 3" wide adjustable belts)
- End plate with cut-out for easy and safe removal of collected product
- Casters for portability
- Non-skid levelers for variable height adjustment
- Inline or 90-degree interface to accommodate available floor space


Applications

- Addressing
- Attaching
- Coding
- Date Stamping
- Labeling
- Printing
- Scanning
- Tabbng
- Tip-On/Affixing
- Verification

Products

- Backer Board
- Booklets
- Brochures
- Cardstock
- Collapsed Cartons
- Envelopes
- Folded Documents
- Folders
- Manuals
- Post Cards
- Sheet Paper

Contact our experienced sales team today for a comprehensive review of your application/product and see how our Shingling Conveyor can benefit your company.

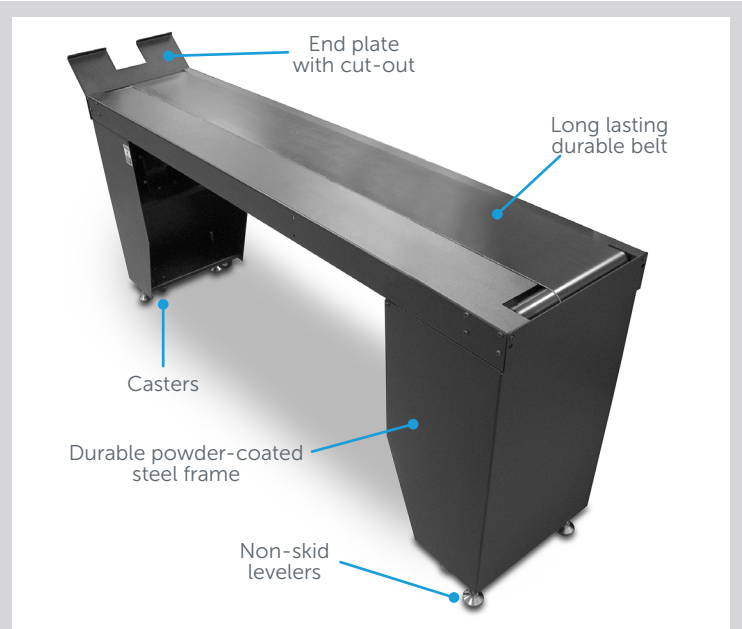

Specifications	
Maximum Product Size	12" wide x 12" long (305 x 305 mm)
Minimum Product Size	4" wide x 4" long (102 x 102 mm)
Speed	Variable, 63 feet/minute (19.3m/min)
Utilities	115vac, 60Hz, 5A
Discharge Height	29.5-33.5" (75-85 cm)
Dimensions	72" long x 15.5" wide (183 x 39 cm)
Warranty	One year limited
Other sizes and thickness capabilities available.	

AMBEC | CBI | Fleetwood | Goldco | Nigrelli | Streamfeeder | SWF | Thiele | Tisma

