P Series Friction Feeders

Available tower lamp

One-knob side guide adjust

24" tall stainless steel side guides

Easy to use remote operator interface

Available low stack detect

Available unique two-tier wedge for short and long products

Durable stainless steel construction

Long-lasting gum rubber feed belts with vacuum assist

Available double detect

Available patented rotating gate

Available adjustable angle discharge

Model P-1250
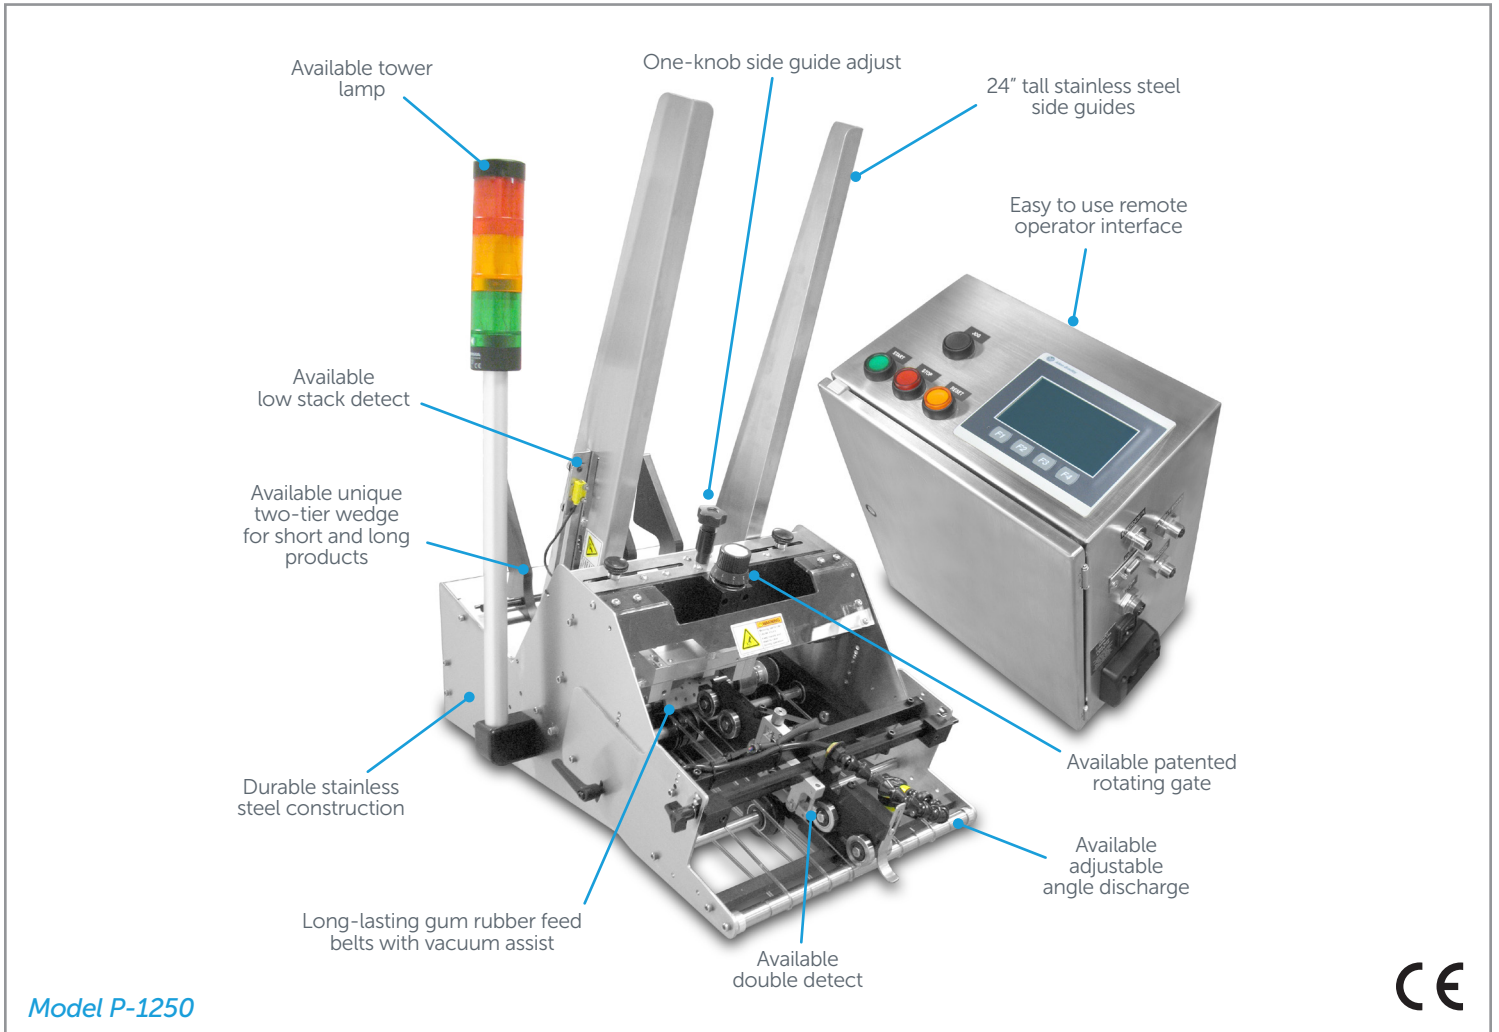
CE

Streamfeeder's P Series Friction Feeders easily integrate to a variety of host and control systems such as cartoners, case erectors, wrappers, WMS and more.

Feed a wide variety of flat and multi-thickness products. Operates on-demand, one at a time or batched sets, and continuous feed mode.

P Series Friction Feeders

Standard Features
- Allen-Bradley touch screen display
- Batch counting capabilities
- Isolated 24VDC inputs and outputs
- Miss-detect
- One-knob sideguide positioning
- Photo-sensor trigger
- Rubber feed belts
- Stand-alone self triggering
- Timeout stop
- Trigger delay
- Vacuum assist

Optional Features
- Adjustable discharge
- Double sheet detect
- Low stack detect
- Powered rotating gate
- Small product configuration
- Speed matching
- Tower lamp
- Vacuum transport
- Vertical discharge

Applications
- Batch Counting
- Cartoners
- Case Packers
- Collators
- Envelope Inserters
- Flow Wrappers
- Order Fulfillment
- Poly Baggers
- Shrink Wrappers

Products
- Booklets
- Brochures
- Cardstock
- Collapsed cartons
- Envelopes
- Folded documents
- Product inserts
- Sheet paper

P Series Control Panel

Model P-600

Model P-1800

Specifications for all Models

Batch Size
1-9,999

Belt Speed
7,000 in/min (178 m/min)

Min/Max Product Thickness
.003" to 1.0" (.076 to 25.4 mm)*

Utilities
115/230vac, 50/60 Hz, 12/6A configured)

Warranty
One year limited

Maximum Product Size

P-600
Standard: 6" wide x 9" long (152 x 229 mm)*
Small Product Feeder: 5 W x 5 L in (127 x 127 mm)*

P-1250
12" wide x 14" long (305 x 357 mm)*

P-1800
18" wide x 14" long (457 x 357 mm)*

P-2400
24" wide x 14" long (609 x 357 mm)*

Minimum Product Size

P-600
Standard: 2" wide x 2.5" long (51 x 64 mm)*
Small Product Feeder: 1 W x 1 L in (25.4 x 25.4 mm)*

P-1250
2" wide x 2.5" long (51 x 64 mm)*

P-1800
8" wide x 2.5" long (203 x 64 mm)*

P-2400
4" wide x 2.5" long (101.6 x 64 mm)*

Weight

P-600
Feeder: 45 lbs. (20.4 kg); Control Box: 36 lbs. (16.3 kg)

P-1250 & P-1800
Feeder: 50 lbs. (23 kg); Control Box: 36 lbs. (16.3 kg)

P-2400
Feeder: 60 lbs. (27.2 kg); Control Box: 36 lbs. (16.3 kg)

*Other sizes and thicknesses available.

Contact our experienced sales team today for a comprehensive review of your application/product and see how our P Series Friction Feeders can benefit your company.