

# **IP-7 Tip-On Feeder**

### Overview

The IP-7 Tip-On Feeder with Accuracy-Lock technology is designed for high-speed precision placement of products onto moving carrier targets. The modular design allows IP feeders to be easily integrated into existing equipment such as folder/ gluers, vacuum bases, mail tables, conveyors, flighted infeeds, tip-on systems, or configured as part of a turnkey attaching system.

Streamfeeder's Accuracy-Lock feature ensures tight placement tolerances at high speeds with one or multiple pieces per carrier. Wi-Fi enabled controls allow you to set-up and adjust the IP-7 on-the-fly from an application on your phone, tablet or laptop. Management, operators, and maintenance can view real-time diagnostics and reports allowing them to track productivity, quality and efficiencies.

## **Standard Features**

- Accuracy-Lock
- Gum rubber feed belts
- Variable and on-the-fly Universal mount product placement
  - System I/O interface • Discharge guides ensures

• Adjustable discharge

Stainless steel

construction

Tip-On Systems

Self-adjusting hold-down

- adjustments Servo motor/controller side-to-side registration
- Encoder
- Vacuum assist ready
- One-knob side guide adjust

#### **Applications - Integrates with:** • Flighted Infeeds

- Folders/Gluers
- Vacuum Bases
- Mail Tables
- Conveyors

## Products

- Plastic Cards
- Booklets
- Business Cards
- Coupons
- Folded Documents
- Magnets
- Pharmaceutical
- Inserts
- Promotional Items
- Sample Packs


Contact our experienced sales team today for a comprehensive review of your application/product and see how our IP-7 can benefit your company.

AMBEC | CBI | Fleetwood | Goldco | Nigrelli | Streamfeeder | SWF | Thiele | Tisma



Streamfeeder - BW Integrated Systems 315 27th Avenue Northeast | Minneapolis, MN 55418 USA +1 (763) 502-0000 Streamfeeder.com BWPackagingSystems.com



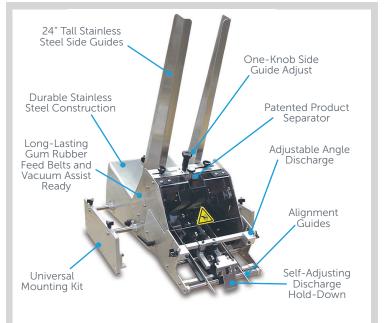

## **Specifications**

Maximum Product Size 7" wide x 6" long (178 x 153 mm) **Minimum Product Size** 

2" wide x "2.5 long (51 x 64 mm)

Min/Max Product Thickness .003" to .250" (.076 to 6.35 mm)

**Belt Speed** 

4,000 in/min (101.6 m/min)

Utilities

230vac, 1Ø, 50/60Hz, 11A

Wi-FI Enabled

Warranty

One year limited

Other sizes and thickness capabilities available.

 Turn-key Attaching Systems